



Jasper PCB

Measurements from top left of PCB in millimetres.

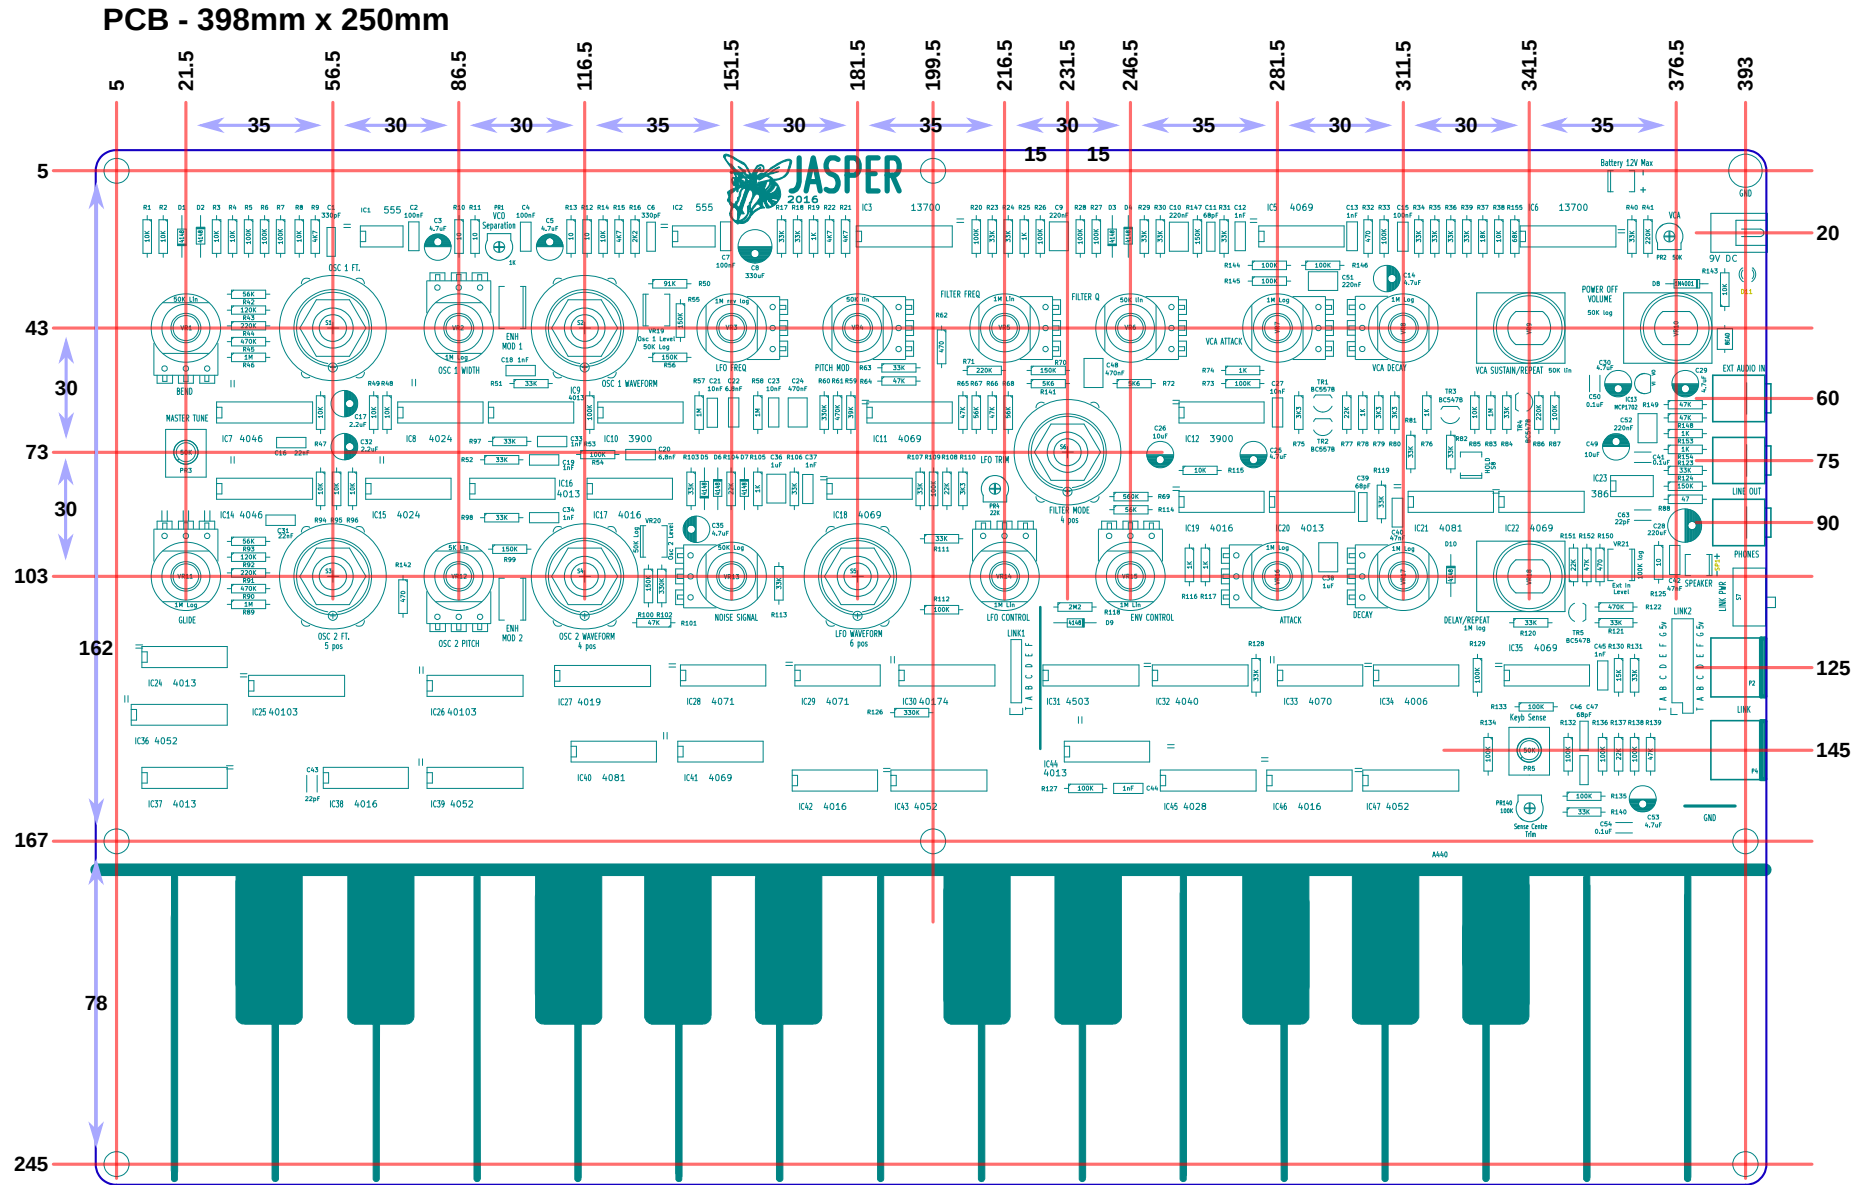

Jasper Panel

Measurements from top left of PCB in millimetres

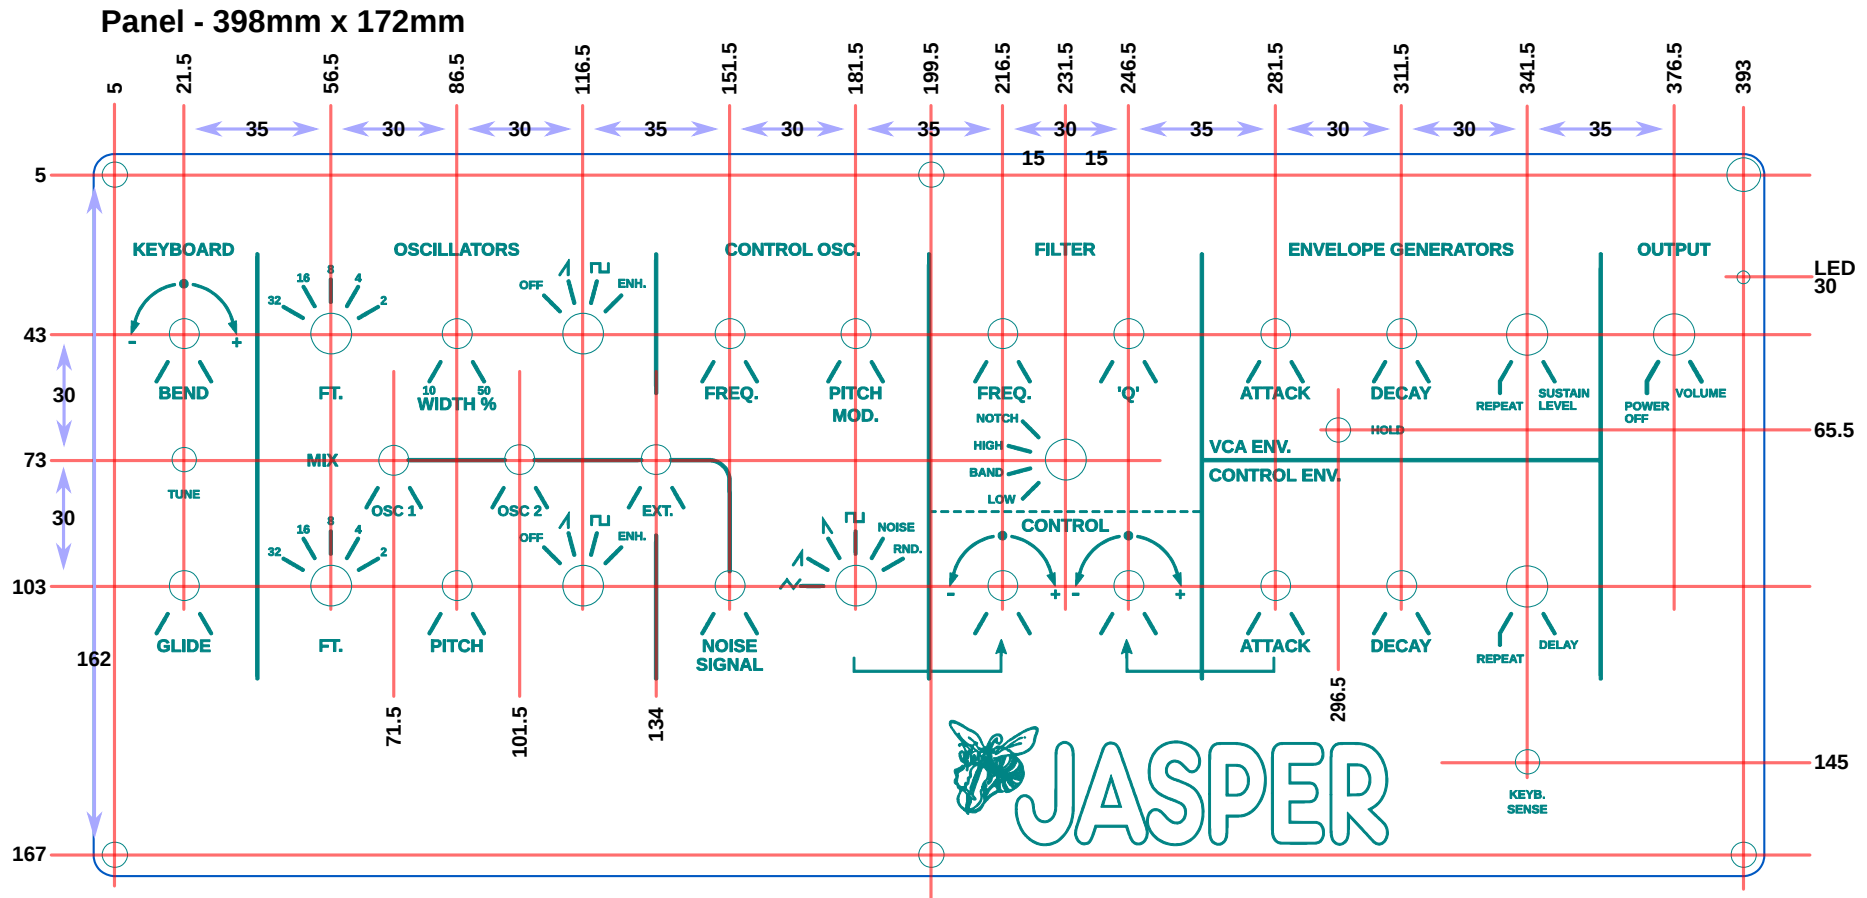

Hole Diameters:

PCB mounting holes:	3.2mm
* note x-position of centre holes will change from 199.5mm to 199mm in next version of PCB	
Potentiometers:	7mm
Rotary switches:	10mm
Switched potentiometers:	10mm
Tune & keyb. Sense pots:	7mm
Hold switch:	6.4mm
Power LED:	3.2mm

Other measurements:

PCB thickness:	1.6mm
Panel thickness:	2.0mm
Height of panel above PCB:	17mm
determined by height of Omeg switched pots.	
Use 17mm stand-offs to support panel above PCB,	
or use 16mm stand-offs with two 0.5mm washers.	

Jasper PCB Features

